



SHOWN: ECLIPSE  
883ECU-SQ-MS-WHA

10' Square Cantilever Umbrella - Matte Silver Finish  
w/ 9 oz. Marine Grade White Acrylic

---

# ECLIPSE<sup>®</sup> ECU

**DESIGNER** - CANTILEVER UMBRELLA


*This umbrella combines style with size, strength, and durability to provide a lasting solution to your shade needs. Its 360° rotation and Infinity Tilt allow for easy opening and closing, while providing complete shade flexibility. Heavy gauge extruded aluminum and stainless-steel parts on a marine grade corrosion resistant aluminum frame ensure the Eclipse<sup>®</sup> is ideal for both commercial and residential environments.*

## SHAPES & SIZES



**OCTAGON**

13<sup>1</sup>/<sub>4</sub>m




**SQUARE**

10' x 10<sup>1</sup>/<sub>3</sub>m



**FRAME FINISHES**

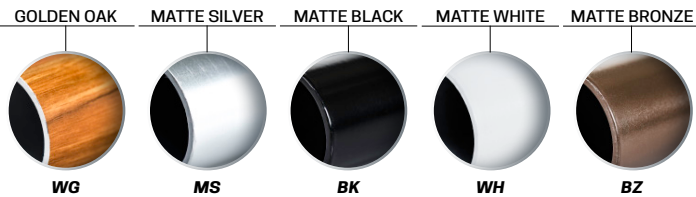

**FEATURES**

Full 360° rotation combined with the Infinity Tilt provide countless hours of maximum shade.

The crank lift is built for commercial use, yet designed for smooth and effortless operation in any environment.

Manufactured with extruded aluminum.

Stainless-steel hardware throughout.

Wind Stabilizer Kit and Black Polyester Protective Cover Bag included.

Mounting options include permanent, semi-permanent, and free-standing bases for installation on any surface.

**Engineered to withstand 35 MPH winds. Included Wind Stabilizer Kit increases tolerance by 5 MPH.**

Please consult a licensed professional for in-ground or surface mounting installations.



**880ECU - 13' / 4M OCTAGON**

- A.** overall height: 110" / 280cm
- B.** clearance: 82" / 208cm
- C.** closed clearance: 30" / 76cm
- D.** overall depth: 163" / 414cm
- MAST:** 3.3" x 5" / 8 x 12.7cm
- WEIGHT:** 126 lbs. / 57 kg.

**883ECU-SQ - 10' x 10' / 3M SQUARE**

- A.** overall height: 110" / 280cm
- B.** clearance: 82" / 208cm
- C.** closed clearance: 27" / 68cm
- D.** overall depth: 135" / 342cm
- MAST:** 3.3" x 5" / 8 x 12.7cm
- WEIGHT:** 115 lbs. / 52 kg.

Umbrella clearance dimensions are measured while not mounted in a base. Depending on the selected base, these clearance measurements will change. All dimensions have a +/-5" tolerance based on multiple variables; pin placement height, crank tautness and fabric weight.

Please consult a licensed professional for in-ground or surface mounting installations.

SPECIFIC MOUNTING **ECLIPSE®** Please see further details on page(s) 54

**40Gx3 Max Galvanized Plate Stack**

**W:** 555 lbs./251 kg. **D:** 40"/101cm **H:** 2"/50mm

Free-Standing Base

**36G-SQx3 Max Galvanized Plate Stack**

**W:** 600 lbs./272 kg. **D:** 36"/91cm **H:** 2"/50mm

Free-Standing Base

**ECU-480 Wheel Base (SHIPS EMPTY)**

**W:** 80 lbs./36 kg. **D:** 36"/91cm **H:** 5"/13cm

Free-Standing Base (Residential Use Only)

**NGU550 Galvanized Steel Max**

**W:** 550 lbs./249 kg. **D:** 45"/114cm **H:** 5"/13cm

Free-Standing Base

**ECU-DP Surface Mounting Plate**

**W:** 12 lbs./5 kg. **D:** 12.5"/32cm **H:** .5"/12.7mm

Installed Surface Mount

**ECU-IG In-Ground Mount**

**W:** 18 lbs./8 kg. **D:** 8"/20cm **H:** 20"/50cm

Installed In-Ground Mount

# SPECIFIC MOUNTING **ECLIPSE®**



### 40Gx3 Max Galvanized Plate Stack

**W:** 555 lbs./252 kg. **D:** 40"/101cm **H:** 2"/50mm

Triple stack 40G is a require minimum Galvanized plate option for the Eclipse® Cantilever.

**NOTE:** When stacking plates, bolts will only "bite" to bottom plate. Rotate thread-less holes on additional stacking plates to match threaded holes on bottom plate.



### 36G-SQx3 Max Galvanized Plate Stack

**W:** 600 lbs./272 kg. **D:** 36"/91cm **H:** 2"/50mm

Triple stack 36G-SQ is a require minimum Galvanized plate option for the Eclipse® Cantilever.

**NOTE:** When stacking square plates, there is a dedicated threaded "bottom" plate. Additional top plates will not be threaded. Bolts only bite to bottom plate.




### NGU550 Galvanized Steel Max

**W:** 550 lbs./249 kg. **D:** 45"/114cm **H:** 5"/13cm

Galvanized steel box frame slotted with concrete pavers and matte silver anodized aluminum lid.



MS



### ECU-480 Free-Standing Wheel Base

**W:** 80 lbs./36 kg. **D:** 36"/91cm **H:** 5"/13cm

Galvanized steel box frame slotted for 12 (16x16x2) concrete pavers and matte silver anodized aluminum lid. Locking caster wheels and leveling feet are included. *Pavers are not included.*

**RESIDENTIAL USE ONLY  
SHIPS EMPTY**



MS



### ECU-DP Surface Mounting Plate


**W:** 12 lbs./5 kg. **D:** 12.5"/32cm **H:** .5"/12.7mm

Direct surface mounting deck plate. Can be mounted to concrete or wood deck or any stable solid surface.

Please consult a licensed professional for in-ground or surface mounting installations.



SM



### ECU-IG In-Ground Mount

**W:** 18 lbs./8 kg. **D:** 8"/20cm **H:** 20"/50cm

In-Ground mounting stem for concrete, soil, hard clay.

Please consult a licensed professional for in-ground or surface mounting installations.